

# Joint (synergistic) applications of the NRFA (daily mean flows) with other UK datasets (rainfall and water quality): selected case studies from the 1990s


Ian Littlewood - Editor (BHS) *Hydrology Research* (formerly at CEH and the Water Data Unit)

The NRFA, used primarily to assist with strategic UK water resources (quantity) monitoring/assessment, has facilitated and stimulated other hydrological research covering the UK - the poster outlines two examples

## River mass load estimation

### NRFA

daily mean flows



### Harmonised Monitoring Scheme (HMS)



river water quality concentrations





catchments above gauging stations/sampling sites, by coastal zones

e.g.

Great Britain: Nitrate-N annual load estimates

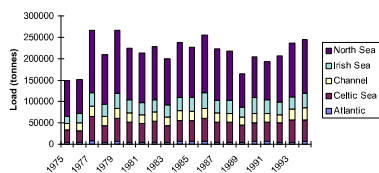

Great Britain: Total phosphorus annual load estimates

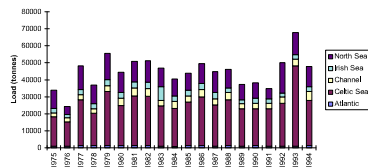


Littlewood, I.G., Watts, C.D., Green, S., Marsh, T.J. and Leeks, G.J.L. (1997). *Aggregated river mass loads for Harmonised Monitoring Scheme catchments grouped by PARCOM coastal zones around Great Britain*. Institute of Hydrology commissioned report to the Department of the Environment, 91pp + Appendices.

Littlewood, I.G., Watts, C.D. and Custance, J.M. (1998). Systematic application of United Kingdom river flow and quality databases for estimating annual river mass loads. *The Science of the Total Environment*, 210/211, 21-40.

Littlewood, I.G. and Marsh, T.J. (2005). Annual freshwater river mass loads from Great Britain, 1975 to 1994: estimation algorithm, database and monitoring network issues. *Journal of Hydrology*, 304, 221-237.

## Rainfall-streamflow (RS) model parameter regionalisation

In the UK and elsewhere spatially lumped conceptual RS models, e.g. IHACRES, have been applied to national river flow and rainfall **daily** datasets, seeking relationships between model dynamic response characteristics (DRCs) and physical catchment descriptors (PCDs) - e.g. to assist with estimating hydrographs for ungauged catchments and for climate change impact studies.

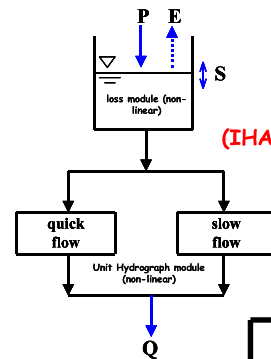

$c$  - depth of a conceptual catchment wetness store [L]

$\tau_w$  - catchment drying time constant [T]

$f$  - temperature modulation factor ( $^{\circ}C^{-1}$ )

(IHACRES DRCs)

$\tau(q)$  - quick flow response decay time constant [T]

$\tau(s)$  - slow flow response decay time constant [T]

SFI - slow flow index [-]

daily data for 60 UK (NRFA) basins ...

Sefton, C.E.M. and Boorman, D.B. (1997). A regional investigation of climate change impacts on UK streamflow. *J. Hydrol.*, 195, 26-44.

Sefton, C.E.M. and Howarth. (1998). Relationships between dynamic response characteristics and physical descriptors of catchments in England and Wales. *J. Hydrol.*, 211, 1-16.

Recent work indicates that the typical large uncertainty in statistical relationships between DRCs (any model) and PCDs might be reduced, e.g. by using **sub-daily** data for flashy gauged catchments.



Littlewood, I.G. and Croke, B.F.W. (2013). Effects of data time-step on the accuracy of calibrated rainfall-streamflow model parameters: practical aspects of uncertainty reduction. *Hydrology Research*, 44(3), 430-440. doi:10.2166/nh.2012.099.

also

Littlewood (in press). Regionalisation of rainfall-streamflow models for estimating flows in ungauged basins: towards reducing uncertainty. In (eds) Pomeroy, Spence and Whitfield, *Putting PUB into Practice*.